FACTOR conference tables

Product information

www.svenheim.no

Svenheim

Product information - Factor conference tables

Among our Factor tables, you can choose from a number of combinations on table tops and legs. This gives you the opportunity to shape your meeting place as you wish. Table tops are made of 25 mm MDF core. Available with straight and chamfered edges and big variety of decors as standard. Legs are delivered either in metal or wood. Metal leg dimensions: 70x50mm. Powder coated in the gray, black and white or in chrome. Wooden leg dimensions 75x45mm, delivered with surfaces in clear lacquered, white pigmented or black-stained oak.

STANDARDD ECORS

White
Grey
Anthracite
Birch veneer
Beech veneer
Oak veneer
White-pigmented oak
Black stained oak

Mushroom linoleum 4176 DT
Ash linoleum 4132 DT
Pebble linoleum 4175 DT
Charcoal linoleum 4166 DT

Straight edge

or

Chamfered edge

METAL LEGS

White
Black
Grey
Chrome

WOODEN LEGS

Oak
White-pigmented oak
Black stained oak

Core material	MDF
Tabletop form	Rectangular, cone, round
Edge	On veneer decors. If straight edge - edging 2 mm; if chamfered edge - edging 2 mm on straight part and clear laquered on chamfered part.
	On laminate or linoleum decors. If straight edge - edging 2 mm; if chamfered edge - edging 2 mm on straight part and painted on chamfered part.
Decors	Veneer structure is following tabletop l enghtwi s e.
	Tabletops and hatches in white or grey are made with high pressure laminate.
Finishing	UV clear laquer on veneer.
Corners	90 degrees
Thickne ss	26 mm
Legs	Metal: white (RAL 9010), grey (RAL 9006), black (RAL 9005) and chrome
	Metal legs: 70x50 mm
	Wooden legs: 75x45 mm
Table height	50 cm, 74 cm, 90 cm, 105 cm

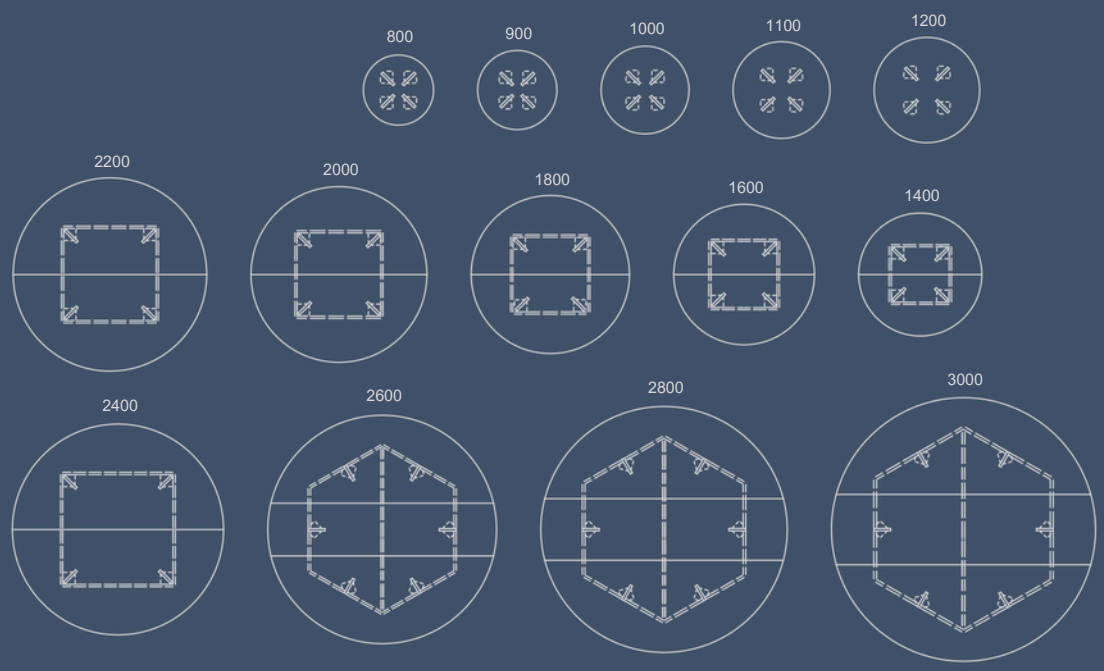
800
900
1000
1100
1200
2200
2000
1800
1600
1400
2400
2600
2800
3000

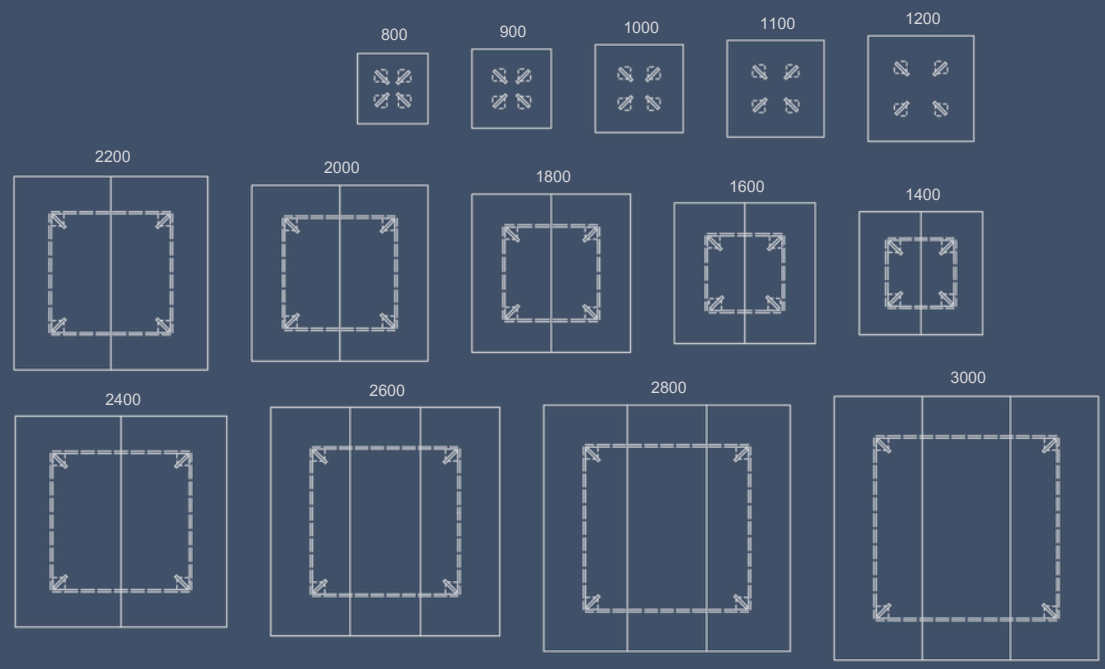
800
900
1000
1100
1200
2200
2000
1800
1600
1400
2400
2600
2800
3000

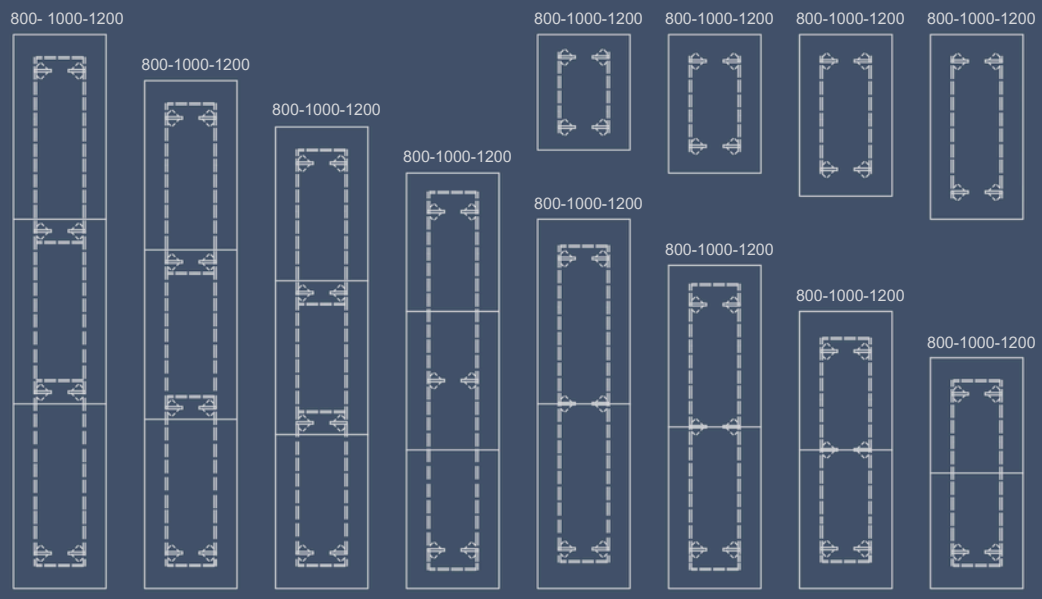
800- 1000-1200
800-1000-1200
800-1000-1200
800-1000-1200
800-1000-1200
800-1000-1200
800-1000-1200
800-1000-1200
800-1000-1200
800-1000-1200
800-1000-1200
800-1000-1200

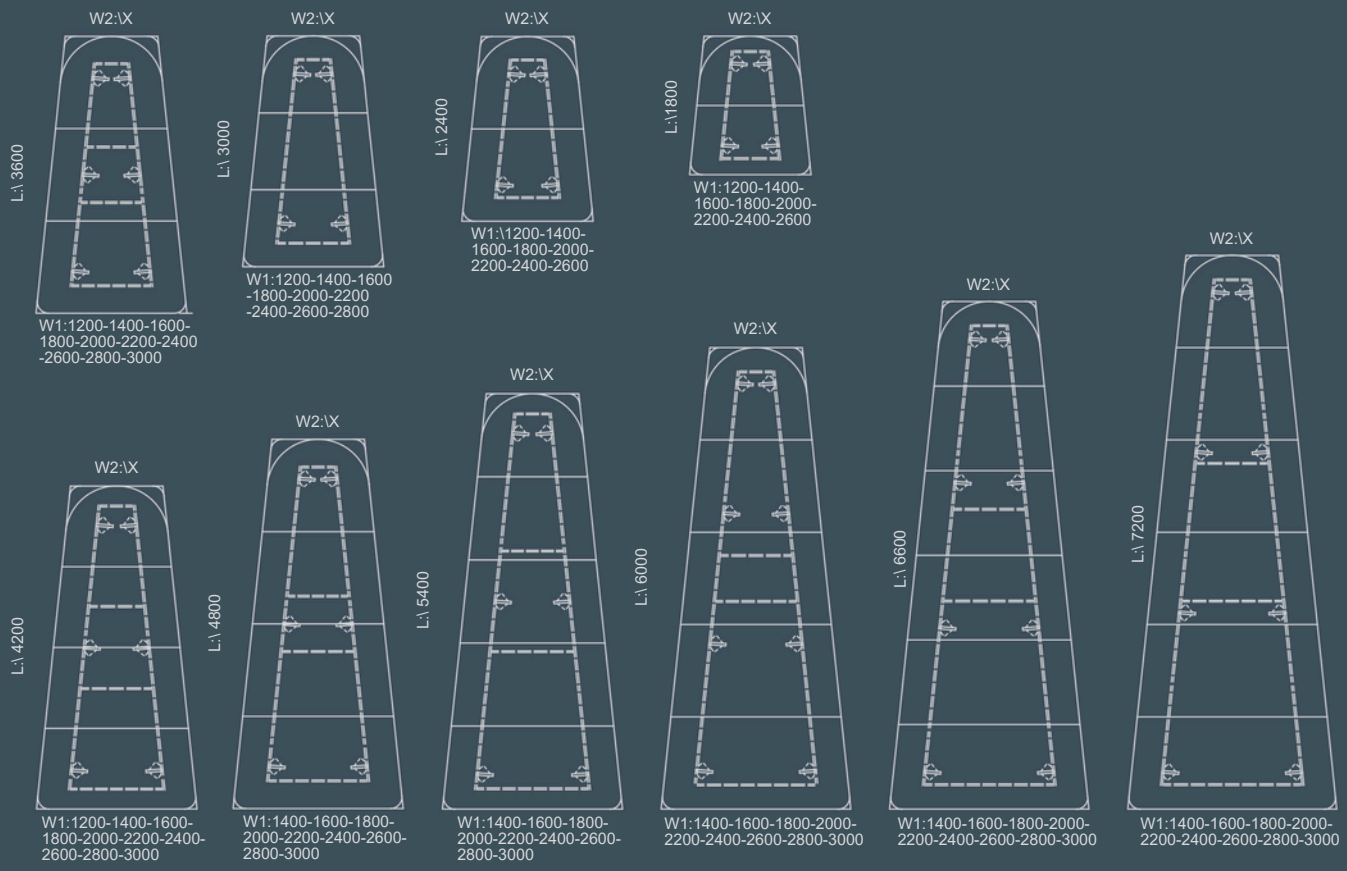
W2:\X
L:\ 3600
W1:1200-1400-1600-1800-2000-2200-2400-2600-2800-3000
W2:\X
L:\ 3000
W1:1200-1400-1600-1800-2000-2200-2400-2600-2800
W2:\X
L:\ 2400
W1:\1200-1400-1600-1800-2000-2200-2400-2600
W2:\X
L:\1800
W1:1200-1400-1600-1800-2000-2200-2400-2600
W2:\X
L:\ 4200
W1:1200-1400-1600-1800-2000-2200-2400-2600-2800-3000
W2:\X
L:\ 4800
W1:1400-1600-1800-2000-2200-2400-2600-2800-3000
W2:\X
L:\ 5400
W1:1400-1600-1800-2000-2200-2400-2600-2800-3000
W2:\X
L:\ 6000
W1:1400-1600-1800-2000-2200-2400-2600-2800-3000
W2:\X
L:\ 6600
W1:1400-1600-1800-2000-2200-2400-2600-2800-3000
W2:\X
L:\ 7200
W1:1400-1600-1800-2000-2200-2400-2600-2800-3000

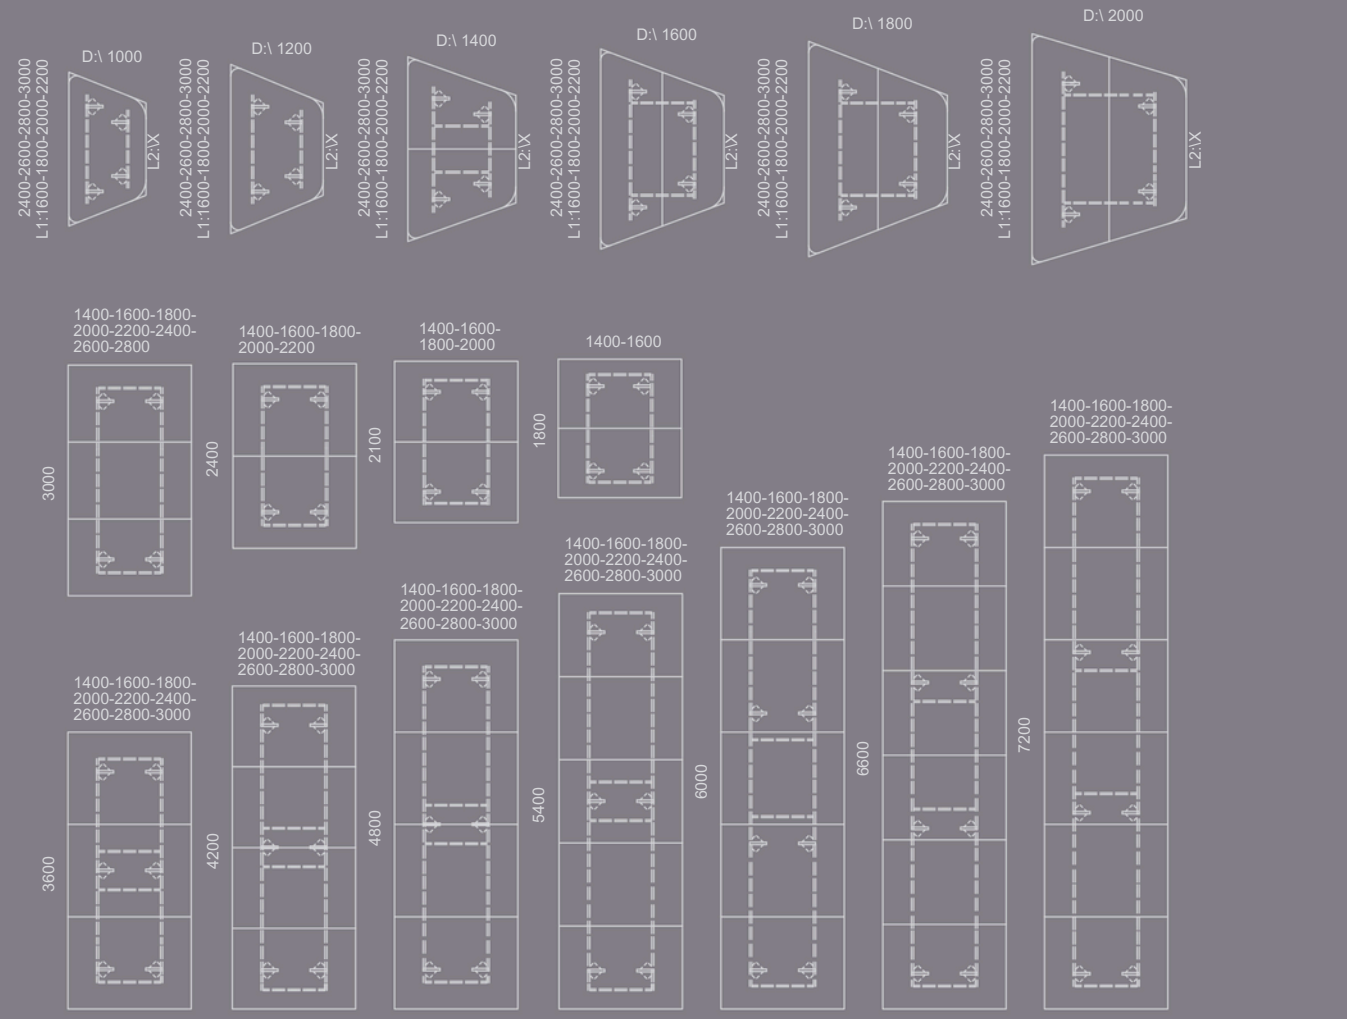
D:\ 1000
2400-2600-2800-3000
L1:1600-1800-2000-2200
L2:\X
D:\ 1200
2400-2600-2800-3000
L1:1600-1800-2000-2200
L2:\X
D:\ 1400
2400-2600-2800-3000
L1:1600-1800-2000-2200
L2:\X
D:\ 1600
2400-2600-2800-3000
L1:1600-1800-2000-2200
L2:\X
D:\ 1800
2400-2600-2800-3000
L1:1600-1800-2000-2200
L2:\X
D:\ 2000
2400-2600-2800-3000
L1:1600-1800-2000-2200
L2:\X
1400-1600-1800-2000-2200-2400-2600-2800
3000
1400-1600-1800-2000-2200
2400
1400-1600-1800-2000
2100
1400-1600
1800
1400-1600-1800-2000-2200-2400-2600-2800-3000
3600
1400-1600-1800-2000-2200-2400-2600-2800-3000
4200
1400-1600-1800-2000-2200-2400-2600-2800-3000
4800
1400-1600-1800-2000-2200-2400-2600-2800-3000
5400
1400-1600-1800-2000-2200-2400-2600-2800-3000
6000
1400-1600-1800-2000-2200-2400-2600-2800-3000
6600
1400-1600-1800-2000-2200-2400-2600-2800-3000
7200

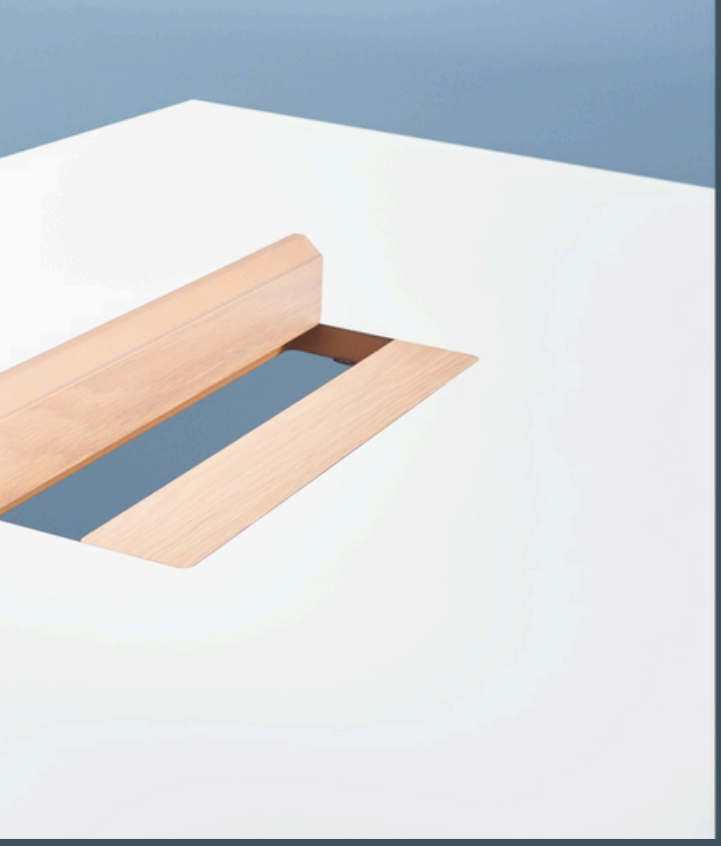

Our production is certified according to ISO 9001 and14001. EPD is available. Our office in Norway has Milj øfyrtårn certificate.

Factor is tested accordingly to theese standards:

EN 15372; EN 1730;
Surfaces EN 12720:2009+A1:2013;
EN 12722:2009+A1:2013; SS 83 91 22; SIS 83 91 17;

Cleaning and maintenance

General

Svenheim uses materials and surfaces that are resistant. No special maintenance beyond normal is required cleaning. Recommended cleaning method is cloth soaked in slightly warm water with a mild synthetic detergent. Avoid green soap or substances containing ammonia. Do not use solvents or cleaning detergents with abrasive / scouring powder.

Powder coated steel components

Used for table base. Clean as under «general» suggestions. Difficult stains are removed with chemical gasoline. Do not use solvents or cleaners with abrasive / scouring powder. Installation instructions for base are enclosed.

Recycling

Sorting is a natural part of Svenheim's production and material handling. Steel components included in our products are 100% recyclable. Plates from Svenheim can be recycled as heat at approved heating systems. Plastic and metal is delivered to approved environmental stations. Svenheim is a member of the return schemes Green Dot Norway for packaging and Eurovironment (Electrical return) for electrical components.

For orders and other questions please contact us at:
e-mail: post@svenheim.no; tel. +47 35 58 75 00 check our website www.svenheim .no

Ask for more detailed information about FSC® certified products